



BU



BU is a range of universal, surface mounted batten fittings. Suitable for mounting within cornicing, as an indirect light source or directs onto the ceiling in non-working areas where an unshielded lamp is acceptable. Available in a range of lengths the compact body is formed from mild steel and powder coated white. An optional white painted steel reflector is also available.



- Single & twin lamp versions
- Compact construction
- Full range of dimming options
- Optional reflector accessory
- Dual-wattage ballast available

BU Single

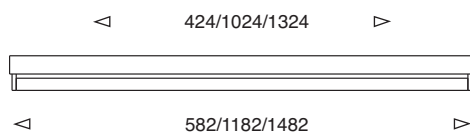

BU Twin

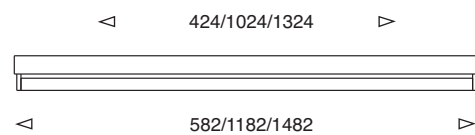

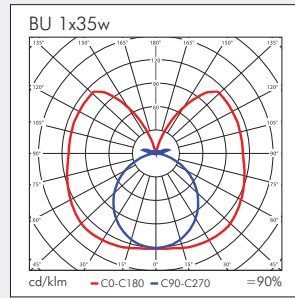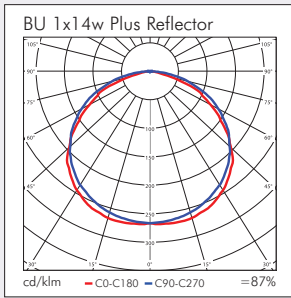

Product	Available Options	Power	Weight	Height	Width/Length	Fixing Centres
BUB-114	-DSI,-110,-DALI,-SD,-EMR	1 x 14w	0.65kg	74	51 x 582	424
BUB-128	-DSI,-110,-DALI,-SD,-EMI	1 x 28w	1.30kg	74	51 x 1182	1024
BUB-135	-DSI,-110,-DALI,-SD,-EMI	1 x 35w	1.70kg	74	51 x 1482	1324
BUB-154	-DSI,-110,-DALI,-SD,-EMI	1 x 54w	1.25kg	74	51 x 1182	1024
BUB-214	-DSI,-110,-DALI,-SD,-EMR	2 x 14w	0.65kg	74	51 x 582	424
BUB-228	-DSI,-110,-DALI,-SD,-EMI	2 x 28w	1.30kg	74	51 x 1182	1024
BUB-235	-DSI,-110,-DALI,-SD,-EMI	2 x 35w	1.70kg	74	51 x 1482	1324
BUB-254	-DSI,-110,-DALI,-SD,-EMI	2 x 54w	1.25kg	74	51 x 1182	1024

Options Code Suffix

Dimming - DSI	-DSI
Dimming - 110	-110
Dimming - DALI	-DALI
Dimming - Switchdim	-SD
3 Hour Internal Emergency Facility	-EMI
3 Hour Remote Emergency Facility	-EMR

Light Source	Code		Power	Lampholder	Colour Temp	Output
	ILCOS	LBS				
Linear Fluorescent T5	FDH	T16	14w	G5	865	1100 lm
Linear Fluorescent T5	FDH	T16	28w	G5	865	2400 lm
Linear Fluorescent T5	FDH	T16	35w	G5	865	3100 lm
Linear Fluorescent T5	FDH	T16	54w	G5	865	4250 lm

Accessories Code Suffix

White Painted Reflector	-REF
-------------------------	------