



CX

The CX is a ceiling mounted fitting that can also be suspended (via optional kit). Featuring the Virtual Daylight® polarising lens, the CX is suited to classrooms, corridors, hospital and similar areas. Ideal for space that needs a crisp, clean, robust fitting, but does not require an IP rating.

- Virtual Daylight® specification
- T5 lamps
- One piece body construction
- Surface or suspended
- BESA fixing

CX

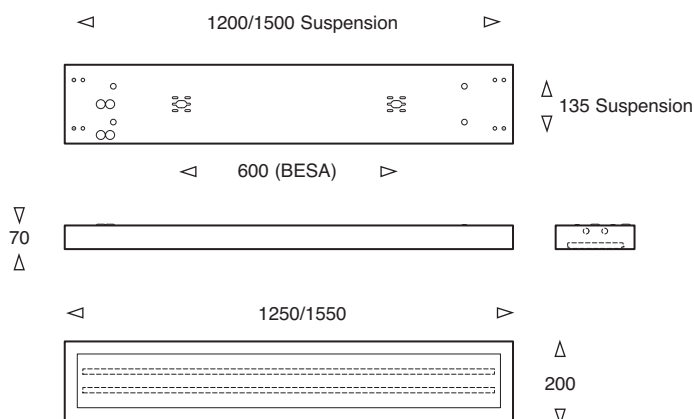

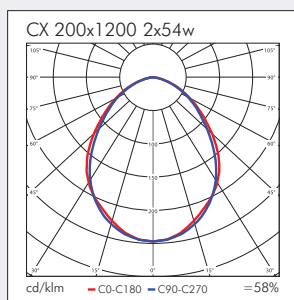

Product	Available Options	Power	Weight	Height	Width/Length	Fixing Centres (BESA)
CX2-128	-DSI,-110,-DALI,-SD,-EMI	1 x 28w	5.3kg	70	220 x 1250	600
CX2-154	-DSI,-110,-DALI,-SD,-EMI	1 x 54w	5.3kg	70	220 x 1250	600
CX2-135	-DSI,-110,-DALI,-SD,-EMI	1 x 35w	5.3kg	70	220 x 1550	900
CX2-228	-DSI,-110,-DALI,-SD,-EMI	2 x 28w	5.3kg	70	220 x 1250	600
CX2-254	-DSI,-110,-DALI,-SD,-EMI	2 x 28w	5.3kg	70	220 x 1250	600
CX2-235	-DSI,-110,-DALI,-SD,-EMI	2 x 35w	7.0kg	70	220 x 1550	900
CX2-249	-DSI,-110,-DALI,-SD,-EMI	2 x 49w	7.0kg	70	220 x 1550	900

Options **Code Suffix**

Dimming - DSI	-DSI
Dimming - 110	-110
Dimming - DALI	-DALI
Dimming - Switchdim	-SD
3 Hour Internal Emergency Facility	-EMI

Light Source	Code		Power	Lampholder	Colour Temp	Output
	ILCOS	LBS				
Linear Fluorescent T5	FDH	T16	28w	G5	865	2400 lm
Linear Fluorescent T5	FDH	T16	35w	G5	865	3100 lm
Linear Fluorescent T5	FDH	T16	49w	G5	865	4100 lm
Linear Fluorescent T5	FDH	T16	54w	G5	865	4250 lm

Accessories **Code Suffix**

4-Point Suspension Kit	-4SK
------------------------	------