






I-PT

The I-PT features an economical perforated basket construction suitable for lift & tilt installation into exposed ceiling T-grids or offer up via optional suspension arms.

- Central perforated basket
- Economical construction
- 3hr emergency option
- Dimming control options

I-PT

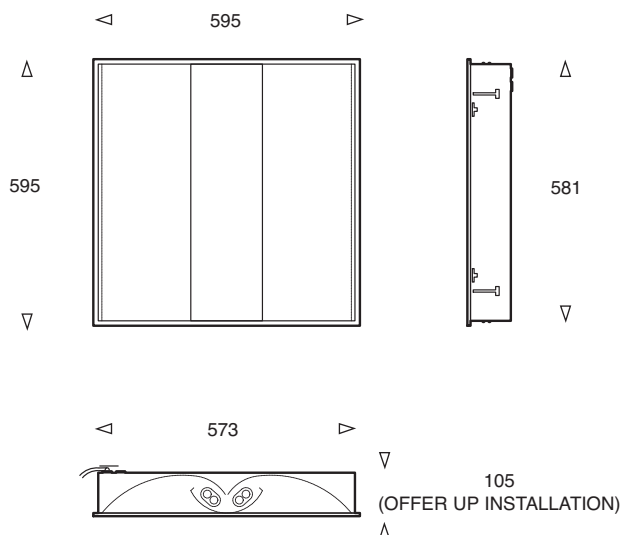

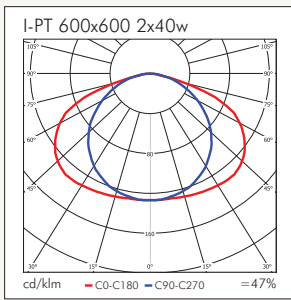

Product	Available Options	Power	Weight	Height	Width	Length
IPT-155	-DSI,-110,-DALI,-SD,-EMI	1 x 55w	5.7kg	105	595	595
IPT-240	-DSI,-110,-DALI,-SD,-EMI	2 x 40w	5.7kg	105	595	595

Options	Code Suffix
Dimming - DSI	-DSI
Dimming - 110	-110
Dimming - DALI	-DALI
Dimming - Switchdim	-SD
3 Hour Integral Emergency Facility	-EMI

Light Source	Code		Power	Lampholder	Colour Temp	Output
	ILCOS	LBS				
Compact Fluorescent	FSDH	TC-L	40W	2G11	865	3500 lm
Compact Fluorescent	FSDH	TC-L	55W	2G11	865	4800 lm

Accessories	Code Suffix
Type2 Fixing Brackets	-FB2