





Inca

The Inca is a ceiling mounted fitting suited to laboratories, clean manufacturing, healthcare and general work areas which need an IP54 rating. As well as housing the Virtual Daylight® polarising lens, the sealed frame has no visible fixings allowing easy wipe down and minimising the opportunity for dirt build-up.

- Virtual Daylight® specification
- Longlife T8 lamp and gear option
- Sealed to IP54 rating
- No visible fixings
- Surface mounted

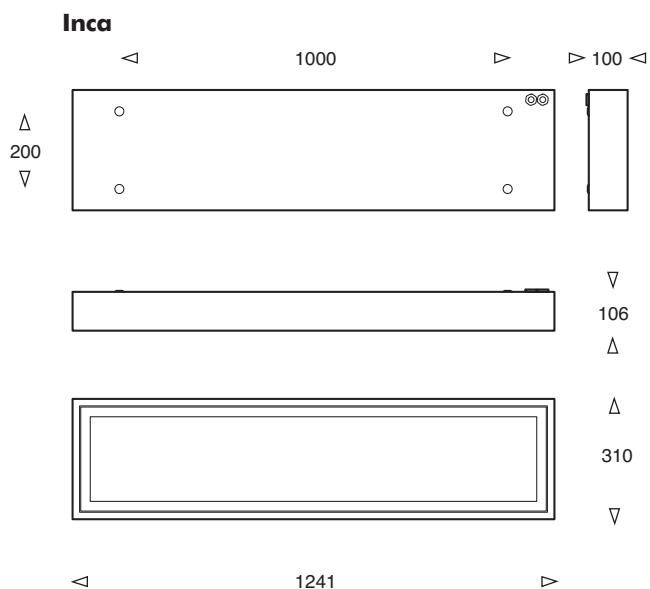

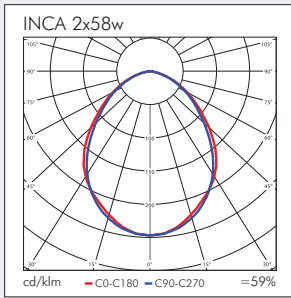

Product	Available Options	Power	Weight	Height	Width/Length	Fixing Centres
ICA-228	-DSI,-110,-DALI,-SD,-EMI	2 x 28w	10.8kg	100	310 x 1241	200 x 1000
ICA-254	-DSI,-110,-DALI,-SD,-EMI	2 x 54w	10.8kg	100	310 x 1241	200 x 1000
ICA-236	-DSI,-110,-DALI,-SD,-EMI,-LL	2 x 36w	10.8kg	100	310 x 1241	200 x 1000
ICA-258	-DSI,-110,-DALI,-SD,-EMI,-LL	2 x 58w	10.8kg	100	310 x 1241	200 x 1000

Options	Code Suffix
Dimming - DSI	-DSI
Dimming - 110	-110
Dimming - DALI	-DALI
Dimming - Switchdim	-SD
3 Hour Internal Emergency Facility	-EMI
Longlife Lamps & Gear	-LL

Light Source	Code		Power	Lampholder	Colour Temp	Output
	ILCOS	LBS				
Linear Fluorescent T5	FDH	T16	28W	G13	865	2400 lm
Linear Fluorescent T5	FDH	T16	54W	G13	865	4250 lm
Longlife Linear Fluorescent T8	FD	T26	36W	G13	865	3150 lm
Longlife Linear Fluorescent T8	FD	T26	58W	G13	865	5000 lm