




Ion


The Ion is an attractive IP65 fitting with natural anodised aluminium frame without any visible fixings. Suitable for ergonomic spaces with clean requirements – catering, laboratories, hospitals, clean manufacturing etc. The Ion will fit into most ceilings (T-grid, plasterboard and metal tile) with voids over 115mm. Supplied with fixing brackets




- Virtual Daylight® specification
- IP65 sealed aluminium frame
- Long life lamp & gear option
- No visible fixings
- Lift & tilt or offer up installation

Ion 600x600

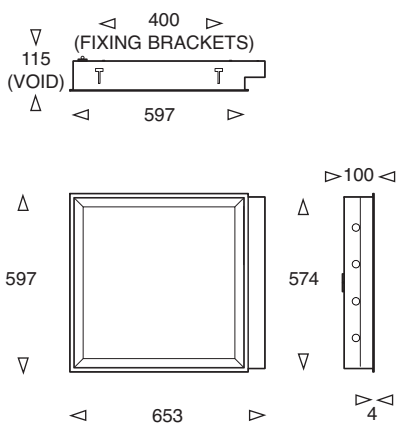

Ion 600x1200

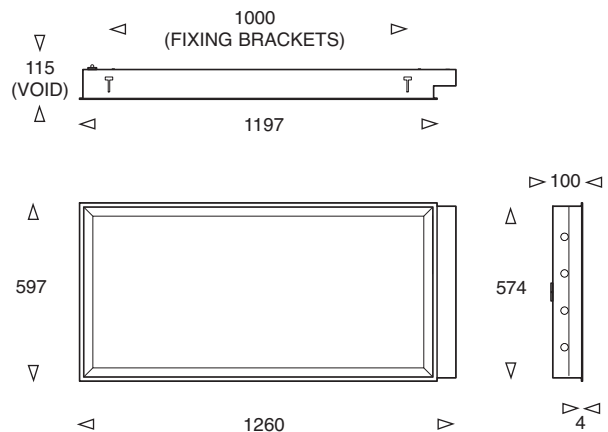

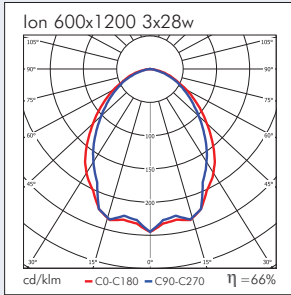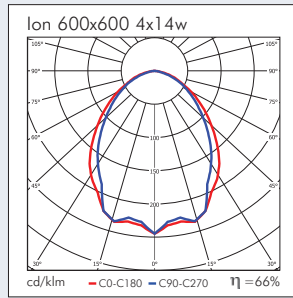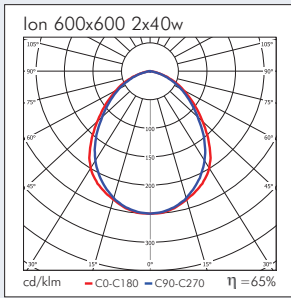

| Product | Available Options | Power | Weight | Height | Width | Length |
|----------|-----------------------------------|---------|--------|--------|-------|--------|
| ION6-240 | -DSI,-110,-DALI,-SD,-EMI,-B45 | 2 x 40w | 10.6kg | 100 | 597 | 597 |
| ION6-314 | -DSI,-110,-DALI,-SD,-LL,-EMI,-B45 | 3 x 14w | 10.6kg | 100 | 597 | 597 |
| ION6-414 | -DSI,-110,-DALI,-SD,-LL,-EMI,-B45 | 4 x 14w | 10.6kg | 100 | 597 | 597 |
| ION6-328 | -DSI,-110,-DALI,-SD,-LL,-EMI,-B45 | 3 x 28w | 19.5kg | 100 | 597 | 1197 |
| ION6-428 | -DSI,-110,-DALI,-SD,-LL,-EMI,-B45 | 4 x 28w | 19.5kg | 100 | 597 | 1197 |

| Options | Code Suffix |
|------------------------------------|-------------|
| Dimming - DSI | -DSI |
| Dimming - 110 | -110 |
| Dimming - DALI | -DALI |
| Dimming - Switchdim | -SD |
| Longlife Lamps & Gear | -LL |
| 3 Hour Internal Emergency Facility | -EMI |
| Chamfered Bezel | -B45 |

| Light Source | Code | | Power | Lampholder | Colour Temp | Output |
|-----------------------|-------|------|-------|------------|-------------|---------|
| | ILCOS | LBS | | | | |
| Compact Fluorescent | FSDH | TC-L | 40W | 2G11 | 865 | 3500 lm |
| Linear Fluorescent T5 | FDH | T16 | 14W | G5 | 865 | 1100 lm |
| Linear Fluorescent T5 | FDH | T16 | 24W | G5 | 865 | 1650 lm |
| Linear Fluorescent T5 | FDH | T16 | 28W | G5 | 865 | 2400 lm |