




Nautilus


The Virtual Daylight® Nautilus will fit into 200mm cut-out in ceilings with voids over 150mm. The low void option reduces the necessary void to 120mm. The Nautilus has reduced glare allowing the 2x18w to be used in some work areas. Suited to circulation space in working areas.

- Drop lens (Virtual Daylight®)
- HF ballast
- Metal gearbox
- Aluminium reflector
- Low void option


Nautilus

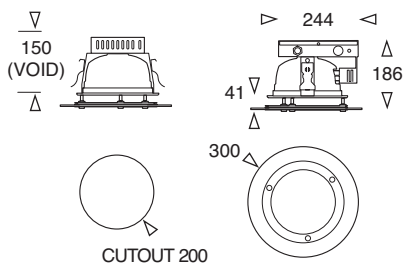


Nautilus (Emergency or Dimming Master)

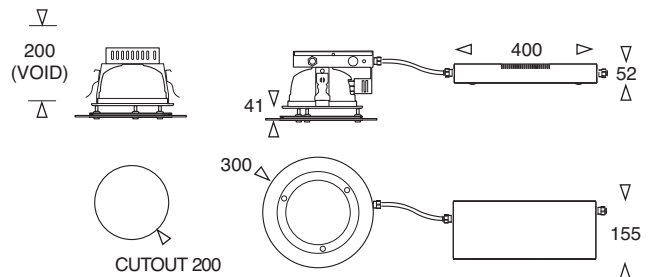


Nautilus Low-Void/Dimming

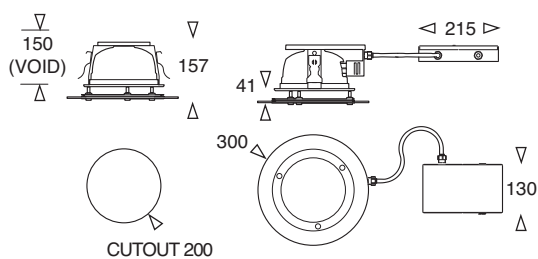

Nautilus Low-Void Emergency

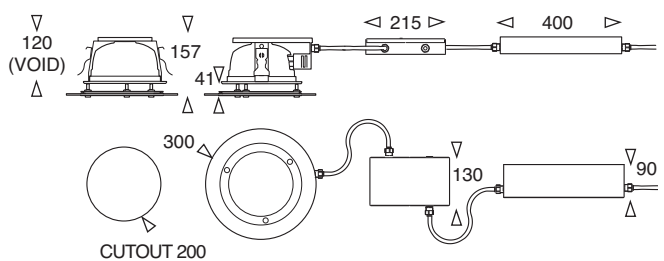



Product	Available Options	Power	Weight	Height	Diameter	Cutout
NLS-218	-DSI,-110,-DALI,-SD,-LV,-EMR	2 x 18w	1.6kg	144/116	300	200
NLS-226	-DSI,-110,-DALI,-SD,-LV,-EMR	2 x 26w	1.6kg	144/116	300	200

Options	Code Suffix
Dimming - DSI	-DSI
Dimming - 110	-110
Dimming - DALI	-DALI
Dimming - Switchdim	-SD
Low Void Option	-LV
3hr Remote Emergency Facility	-EMR

Light Source	Code		Power	Lampholder	Colour Temp	Output
	ILCOS	LBS				
Compact Fluorescent	FSQ-18-E	TC-DEL	18w	G24q-2	860	1200 lm
Compact Fluorescent	FSQ-26-E	TC-DEL	26w	G24q-3	860	1800 lm

Accessories	Code Suffix
Ceiling Support Pattress	-PAT