







Oslo DG (Drop Glass)

The Oslo DG is suitable for installation where a more decorative downlight is required, such as lobbies, receptions, meeting rooms or breakout areas. The 8mm thick drop glass is attached to a twist and lock removable bezel facilitating quick lamp changes. Electronics are housed in a tough Polyamide (30% glass fibre) gearbox which can be clipped onto the back of the body or detached to reduce installation depth (standard version only). Ceiling fix via 3 flip-out and screw down arms. Special colour glass available on request.

- Choice of decorative drop glass attachments
- 99.9% pure aluminium reflector
- Tough GRP gearbox
- Easy 3-step installation
- Optional, metal tile ceiling support pattress.
- Low void version available

Oslo Drop Glass

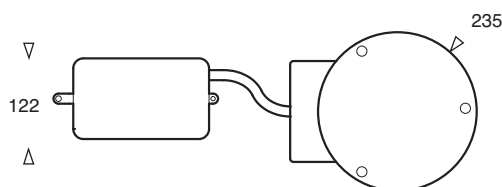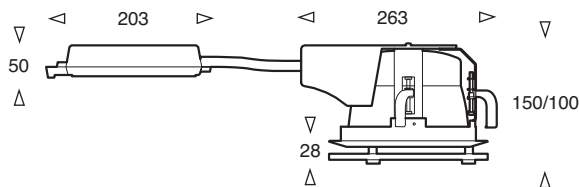

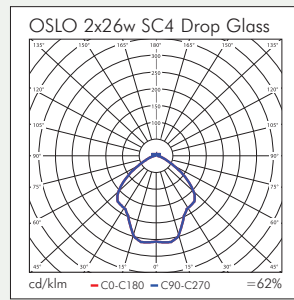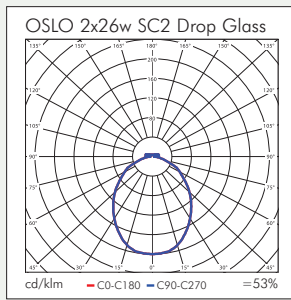

Product	Available Options	Power	Weight	Height	Diameter	Cutout
OSL-DG-218	-DSI,-110,-DALI,-SD,-LV,-EMR	2 x 18w	3.7kg	150/100	235	205
OSL-DG-226	-DSI,-110,-DALI,-SD,-EMR	2 x 26w	4.1kg	150	235	205

Options	Code Suffix
Dimming - DSI	-DSI
Dimming - 110	-110
Dimming - DALI	-DALI
Dimming - Switchdim	-SD
Low Void Option	-LV
3hr Remote Emergency Facility	-EMR

Light Source	Code		Power	Lampholder	Colour Temp	Output
	ILCOS	LBS				
Compact Fluorescent	FSQ-18-E	TC-DEL	18w	G24q-2	860	1200 lm
Compact Fluorescent	FSQ-26-E	TC-DEL	26w	G24q-3	860	1800 lm

Accessories	Code Suffix
Drop Glass Disc - Frosted Centre, Clear Edge	-SC2
Drop Glass Disc - Clear Centre, Frosted Edge	-SC4
Drop Glass Ring - Frosted	-SC6
Ceiling Support Pattress	-PAT