







# Oslo FG (Flush Glass)

**The Oslo FG is suitable for installation where an IP54 rated downlight is desired, such as toilet or changing areas. The 4mm thick frosted tempered glass is housed within a twist and lock removable bezel to facilitate quick lamp changes. Electronics are housed in a tough Polyamide (30% glass fibre) gearbox which can be clipped onto the back of the body or detached to reduce installation depth (standard version only). Ceiling fix via 3 flip-out and screw down arms.**

- Frosted glass front
- 99.9% pure aluminium reflector
- Tough GRP gearbox
- Simple installation
- Optional, metal tile ceiling support pattress
- IP54

## Oslo Flush Glass

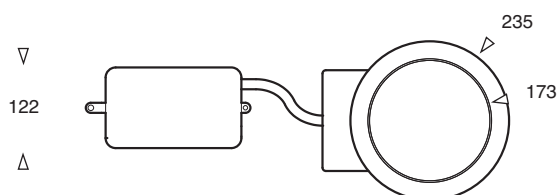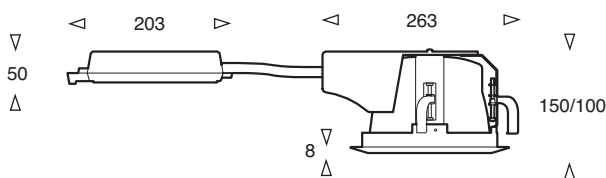



Product	Available Options	Power	Weight	Height	Diameter	Cutout
OSL-FG-218	-DSI,-110,-DALI,-SD,-LV,-EMR	2 x 18w	2.9kg	150/100	235	205
OSL-FG-226	-DSI,-110,-DALI,-SD,-EMR	2 x 26w	3.3kg	150	235	205

Options	Code Suffix
Dimming - DSI	-DSI
Dimming - 110	-110
Dimming - DALI	-DALI
Dimming - Switchdim	-SD
Low Void Option	-LV
3hr Remote Emergency Facility	-EMR

Light Source	Code		Power	Lampholder	Colour Temp	Output
	ILCOS	LBS				
Compact Fluorescent	FSQ-18-E	TC-DEL	18w	G24q-2	860	1200 lm
Compact Fluorescent	FSQ-26-E	TC-DEL	26w	G24q-3	860	1800 lm

Accessories	Code Suffix
Ceiling Support Pattress	-PAT