
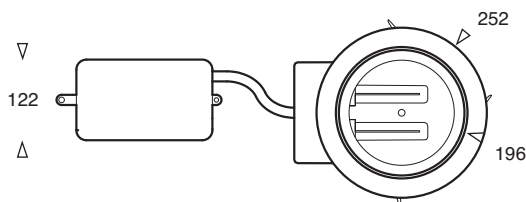



Oslo

The Oslo is manufactured to a high specification, featuring a die-cast bezel and spun aluminium reflector. Electronics are housed in a tough Polyamide (30% glass fibre) remote box which can be clipped onto the back of the body or detached to reduce installation depth (standard version only). Ceiling fix via 3 flip-out and screw down arms.

- 99.9% pure aluminium reflector
- Tough GRP gearbox
- Simple installation
- Optional, metal tile ceiling support pattress available.
- Remote emergency version
- Dimmable versions

Oslo Standard

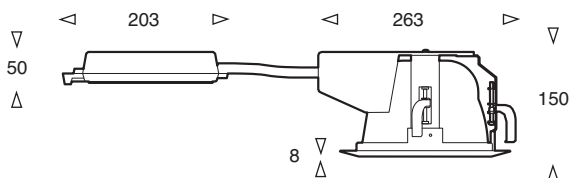

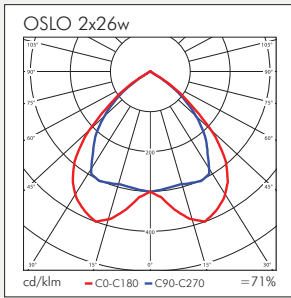

Product	Available Options	Power	Weight	Height	Diameter	Cutout
OSL-218	-DSI,-110,-DALI,-SD,-EMR	2 x 18w	2.2kg	150	252	210
OSL-226	-DSI,-110,-DALI,-SD,-EMR	2 x 26w	2.9kg	150	252	210

Options	Code Suffix
Dimming - DSI	-DSI
Dimming - 110	-110
Dimming - DALI	-DALI
Dimming - Switchdim	-SD
3hr Remote Emergency Facility	-EMR

Light Source	Code		Power	Lampholder	Colour Temp	Output
	ILCOS	LBS				
Compact Fluorescent	FSQ-18-E	TC-DEL	18w	G24q-2	860	1200 lm
Compact Fluorescent	FSQ-26-E	TC-DEL	26w	G24q-3	860	1800 lm

Accessories	Code Suffix
Ceiling Support Pattress	-PAT