



Track Accessories




SP-4R
 F_{max} 200 N




SP-4E
 F_{max} 100 N




SP-4I
 F_{max} 200 N




SP-4L
 F_{max} 100 N




SP-4T
 F_{max} 200 N




SP-4X
 F_{max} 200 N




SP-C16
 F_{max} 200 N

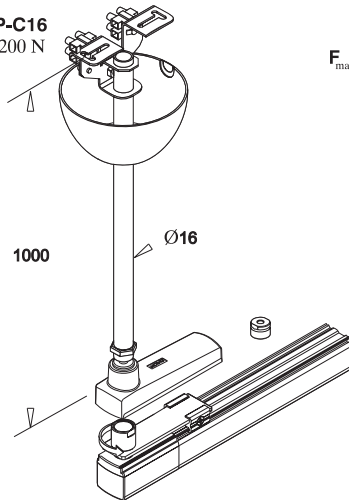


SP-R6
 F_{max} 200 N

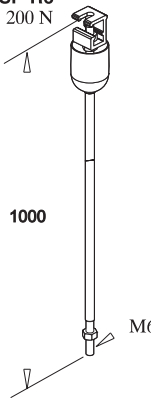

SP-W1
 F_{max} 150 N


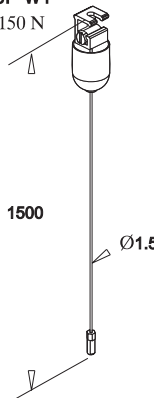


SP-R61
 F_{max} 150 N

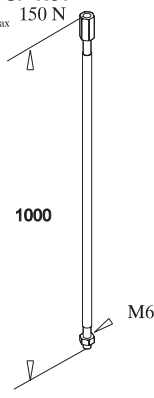


SKB-16


SKB-12




SKB-18




SKB-21




SKB-23



SKB-40




SKB-100



SPW-40






XTSV-12



XTSP-11



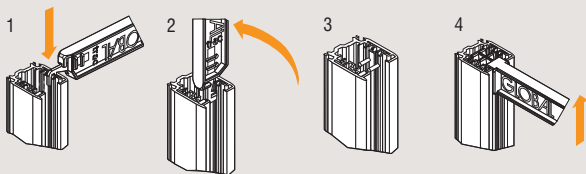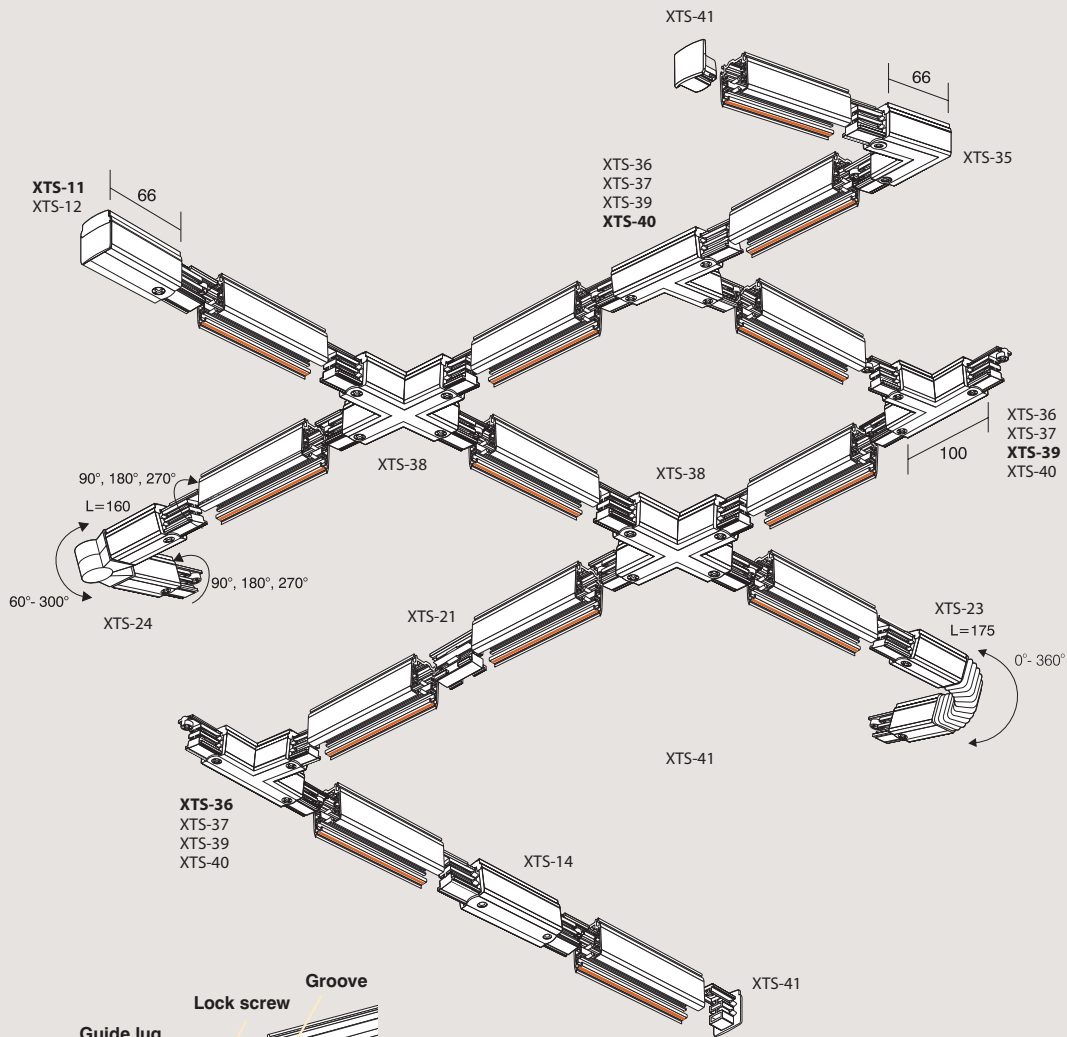

Installation

Installation of the connector parts

When installing the connector parts to the XLS track, it is necessary to ensure that the guide lug enters the groove in the base of the track. The fastening of the connectors to the track are secured by the lock screws

How to cut the XLS track.

XLS lighting tracks are supplied in standard lengths. They are also easy to cut to the required length with a hacksaw or with a circular saw designed for aluminium cutting. After the XLS track has been cut, the conductors have to be bent at an angle of 90 degrees. Use the bending tool XTSV-12 for bending. The conductors can be measured and finished with the plastic gauge at the other end of the tool. The bent conductors are at the right distance from the end of the track when the plastic gauge does not protrude but lies flush with the track end.

The fastening distance and the loading capacity

The tracks are supplied complete with punched fastening holes (see the table). The recommended fastening distance is $L = 1000$ mm.

NOTE: A load not heavier than 10 kg may hang on a power takeoff adapter, the pull strength being 100 N (1 kp = 9.81 N) and the maximum torque 2.5Nm. (XTSA 66 and GA69 5 kg / 50 N).

Distances of the fastening holes

L mm	a mm	b mm	c mm	d mm
1000	250			
2000	250	1000		
3000	250		1000	1000
4000	250		1500	1000

