




Darkstar


An architectural low glare LV downlight with adjustable tilt and rotation. The Darkstar is suited to any environment that needs subtle halogen light, including boardrooms, reception space, residential, restaurants, display areas and public space. DS95 is supplied with long life lamps (10,000 hours) as standard.

- Magnetic rotating bezel
- Anti-glare barrel
- 360 degree rotation
- Fixed (F) or Adjustable 35 degree tilt (A)
- 75mm or 97mm diameter versions


Darkstar DS95-A (adjustable)







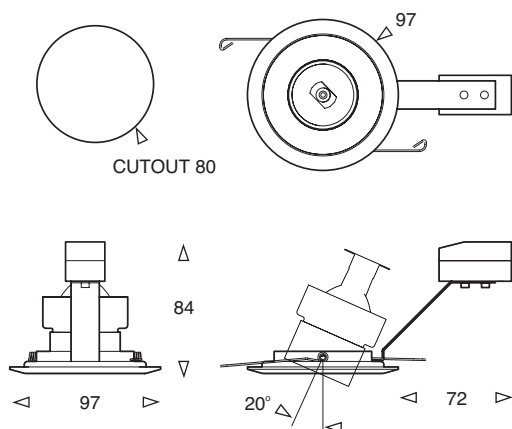


Darkstar DS95-F (Fixed) IP54

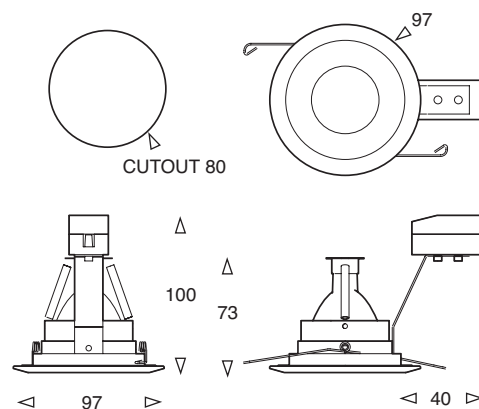

Darkstar DS75-Adjustable

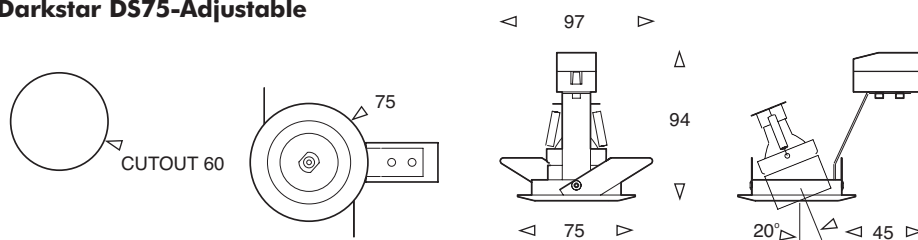

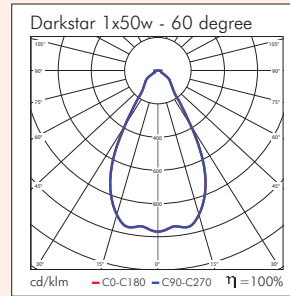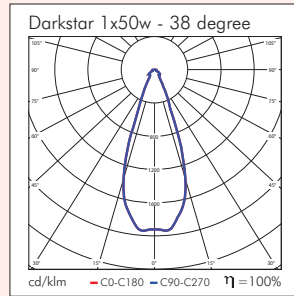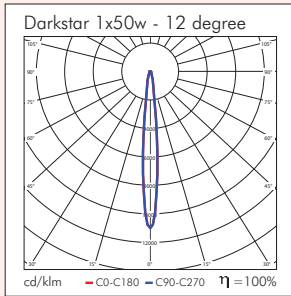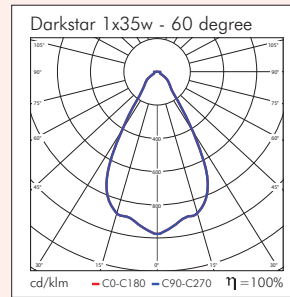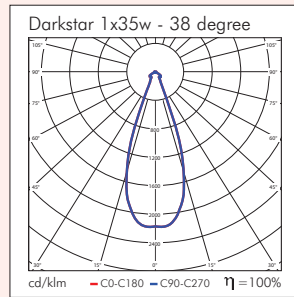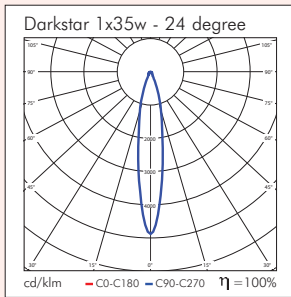

Product	Available Options	Power	Weight	Height	Diameter	Cutout
DS95-F	-DIM,-DALI-20,-35,-50,-12,-24,-38,-60,-IP54,-LED,-RGB	20-50w	0.2kg	100	97	80
DS95-A	-DIM,-DALI-20,-35,-50,-12,-24,-38,-60,-LED,-RGB	20-50w	0.2kg	84	97	80
DS75-F	-DIM,-DALI-20,-35,-10,-38,-IP54,-LED,-RGB	20-50w	0.2kg	100	75	60
DS75-A	-DIM,-DALI-20,-35,-10,-38,-LED,-RGB	20-35w	0.2kg	94	75	60

Options Code Suffix

Dimmable Electronic Transformer	-DIM
DALI Transformer	-DALI
Lamp Wattage (20/35/50)	-20,-35,-50
Lamp Beam Angle (12/24/38/60)	-12,-24,-38,-60
IP54	-IP54
LED	-LED
RGB LED	-RGB

Light Source	Code	Power	Lampholder	Colour Temp	Output
	ILCOS				
	LBS				
Longlife LV Halogen Dichroic 12°	HRGS QR-CBC51	50w	GU5.3	100/30k	6500 cd
Longlife LV Halogen Dichroic 24°	HRGS QR-CBC51	20-50w	GU5.3	100/30k	880/1700/2700 cd
Longlife LV Halogen Dichroic 36°	HRGS QR-CBC51	20-50w	GU5.3	100/30k	450/950/1500 cd
Longlife LV Halogen Dichroic 60°	HRGS QR-CBC51	35-50w	GU5.3	100/30k	400/600 cd
35mm LV Halogen Dichroic 10°	HRGI QR-CBC51	20-35w	GU4	100/31k	3200/500 cd
35mm LV Halogen Dichroic 38°	HRGI QR-CBC51	20-35w	GU4	100/31k	5400/900 cd